GENEBRE

МИКРОВЫКЛЮЧАТЕЛЬ ПРИВОДА

Артикул: 5987

Технические характеристики

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: grb@nt-rt.ru || www.genebre.nt-rt.ru

Art.5987 Caja Final de Carrera con 2 Detectores Inductivos "P + F" NCB2-V3-N0 para Actuadores Neumáticos

Art.5987 Limit Switch Box with 2 Inductive Detectors "P + F" NCB2-V3-N0 for Pneumatic Actuators

CARACTERÍSTICAS

Ha sido diseñado con tecnología de avanzada, son sólidos, estéticos, de alto nivel de calidad y con las siguientes características:

- Estas cajas están fabricadas bajo normas NAMUR (VDI / VDE 3845).
- Grado de Protección de la caja IP 67 según norma UNE 20-324-93.
- Cierre de la caja rápido y fácil con tornillos imperdibles mientras la cubierta esté abierta.
- Fácil ajuste de levas sin herramientas, basada en una leva entablillada por resorte.
- Indicador de posición Abierto/ Cerrado de gran visibilidad.
- Doble entrada para cables M20 x 1,5.
- Regleta con 8 puntos de para las conexiones.
- Soporte con pintura Epoxi.
- 2 Finales de Carrera Inductivos.

CHARACTERISTICS

Was designed with advanced technology which are solid, beautiful, high-level quality and with the following characteristics:

- *These boxes are manufactures in accordance with NAMUR (VDI/VDE 3845).*
- *Ingress Protection IP 67 according to UNE 20-324-93.*
- *Rapid and easy closing of the box with captive cover bolts: no worry to loose bolts while cover opens.*
- *Easy setting without tool based on spring loaded splinted cam.*
- *Position indicator of great visibility Open / Closed.*
- *Dual cable entries M20 x 1,5.*
- *8 points and enough strips for connection.*
- *Bracket with Epoxy Coated painted.*
- *2 Inductive Detectors.*

DIMENSIONES DE CAJA – BOX DIMENSIONS

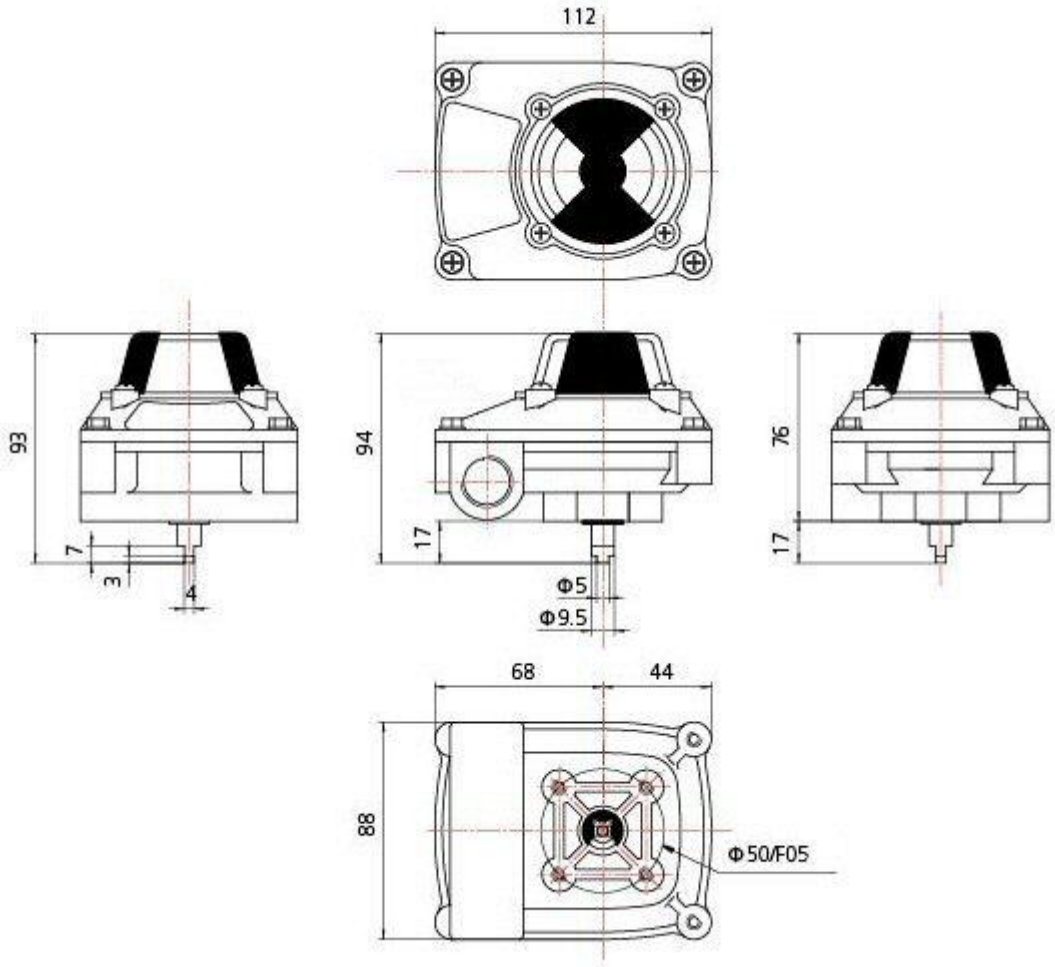

DIMENSIONES DE SENSOR – SENSOR DIMENSIONS

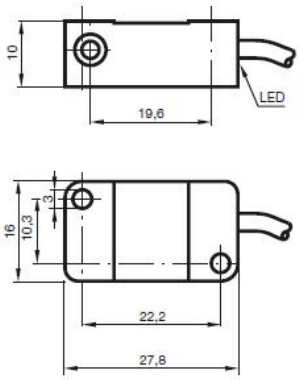

Sensor Pepperl + Fuchs NCB2 – V3 – N0

PARTES COMPONENTES – COMPONENT PARTS

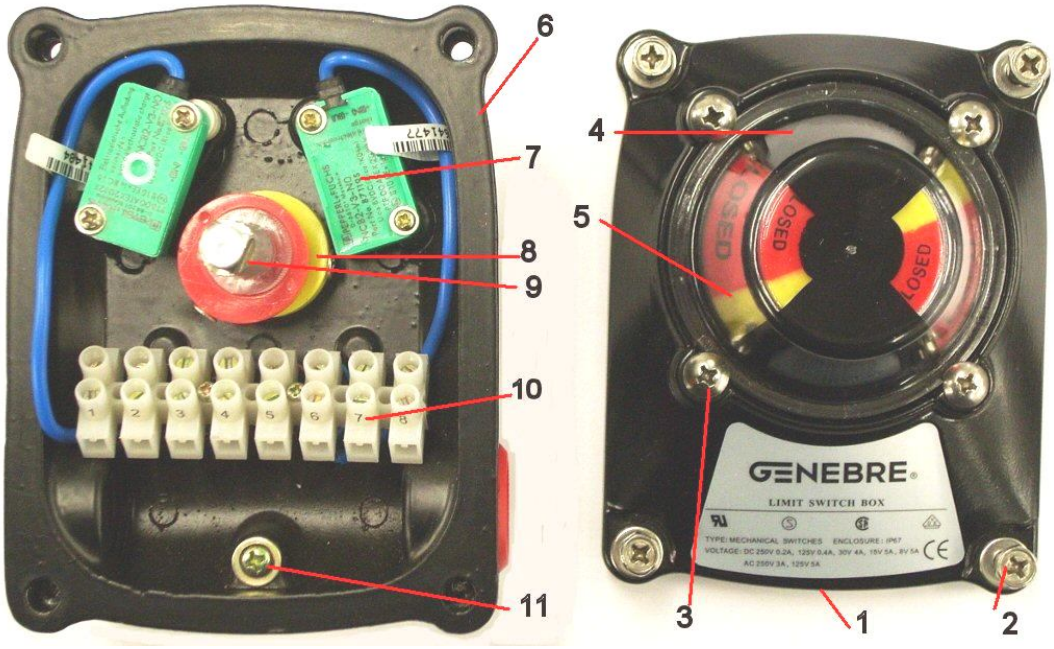

Nº	Denominación / Name	Material	Acabado Superficial/Surface Treatment
1	Tapa de Caja / Box Cover	Aluminio / Aluminum Die Casting	Pintura Epoxi /Powder Coated
2	Tornillos tapa / Cover Bolts	Acero Inoxidable / Stainless Steel	------
3	Tornillos Indicador / Indicator Bolts	Acero Inoxidable / Stainless Steel	------
4	Tapa Indicador / Indicator Cover	Policarbonato / Polycarbonate	------
5	Indicador / Indicator	Policarbonato / Polycarbonate	------
6	Caja / Box	Aluminio / Aluminum Die Casting	Pintura Epoxi /Powder Coated
7	Detectores / Detectors	----------	------
8	Levas / Cam	Policarbonato / Polycarbonate	------
9	Eje / Shaft	Acero Inoxidable / Stainless Steel	------
10	Regleta Bornes / Terminal Strip	Policarbonato / Polycarbonate	------
11	Conexión a tierra / Earth Lug	----------	------

CARACTERISTICAS DE LOS SENSORES – SENSORS FEATURES

CARACTERISTICAS / *FEATURES*	
Modelo de Sensor / *Sensor Inductive Model*	"P+F" NCB2 – V3 – N0
Identificación Atex / *Ex Identification*	EEx ia IIC T6
Función elemento conmutación / *Switching element function*	NAMUR NC.
Distancia de operación / *Detect Distance*	2 mm
Instalación / *Installation*	enrasado / *embeddable*
Polaridad de salida / *Output Polarity*	NAMUR
Distancia de conmutación Asegurada / *Assured operating Distance*	0 ….. 1,62 mm
Tensión nominal / *Nominal Voltage*	8 V
Frecuencia de conmutación / *Switching frecuency*	0 …. 2000 Hz
Histéresis / *Hysteresis*	Tip. 5% / typ. 5%
Consumo de corriente / Current consumption	Sensor no detectado ≥ 3 mA
	Sensor detectado ≤ 1 mA
Indicación de estado conmutación / *Indication of the switching state*	LED amarillo / *yellow*
Material de carcasa Sensor / *Housing Material*	PBT
Grado de protección IP / *IP Ratings*	IP 67
Temperatura de Trabajo / *Working Temperature*	-25 / + 100 ºC

Esquema de Conexión / Wiring Diagram

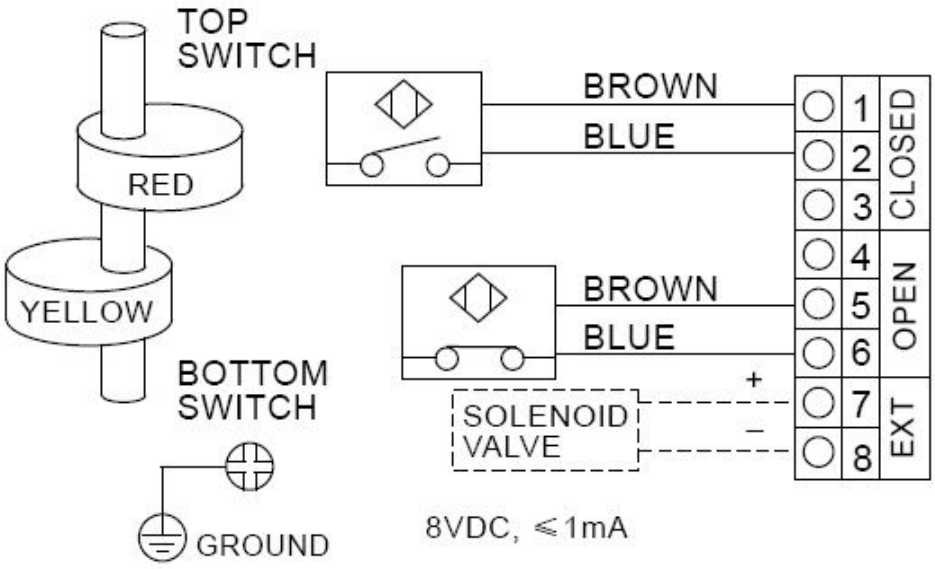

GENEBRE

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: grb@nt-rt.ru || www.genebre.nt-rt.ru